



COLOR

DTT

EASY

A

CONN. F

Ø**60**

CE





UHF antenna SPEED+ 5G series

art. 21-379B SPEED+ 75 5G BIANCA

Designed to maximize the reception of DTT signals in the range E21÷E48 attenuating the LTE 700 MHz band without preventing the proper functioning of channel E48.

High-performance dipole, meticulously designed to maximize performance, with innovative and practical design at the same time, with openable lid to ensure maximum weather resistance without sacrificing a smooth insertion of the F connector.

The elements and their support are reinforced. This characteristic makes the antenna particularly sturdy. Equipped with auxiliary cradle.

Characteristics


- High gain
- Quick installation: elements and mast clamp pre-assembled on the cradle

Excellent value for Front-to-back Ratio

- Fully silver anodized
- · Elements and cradles are reinforced
- Dipole with special attack for the insertion of the waterproof rubber cap
- 21-379B Code SPEED+ 75 5G BIANCA ltem Color white RAL 7035 Channels E21÷E48 Elements 75 no. 19.2 Maximum gain dBi dB > 25 Front-to-back Ratio 26 / 34 Beamwidth (-3 dB) H/V Wind load @ 129 Km / h Ν 160 < 1.2 VSWR 75 Impedance Ω Dimensions (LxWxH) 2507x535x690 mm Cradle mm 20x20 Second cradle 20x20 solid aluminium rod with high mechanical sturdiness Reflector F-type Dipole connector Ø 60 Mast clamp for masts max mm Horizontal and vertical polarization with tilt adjustment included


Packaging

Quantity (pcs)	Dimensions LxWxH (mm)	Weight (Kg)
1	1379x120x440	4

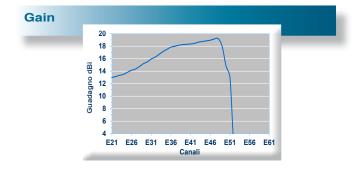

Directivity

The patterns shown represent measurements made in the horizontal plane at the center of the band.



Rev. 0 09.2024

