







Band-pass filter FSP/DIGIT series

art. 22-293/B FSP/DIGIT-E22/E59

This indoor passive filter allows the passage of the channels from E22 to channel E59.




Characteristics

- Shielded housing with screw F-type connectors
- Fixing accessory suitable for masts up to ø 60 mm included

Code		22-293/B
Item		FSP/DIGIT-E22/E59
No. of inputs		1
No. of outputs		1
Working band	Ch.	E22÷E59
Insertion loss of E22 channel	dB	2/10
Insertion loss of E23/E59 channels	dB	< 2
Insertion loss of E20/E21 channels	dB	> 40
Dimensions (LxWxH)	mm	82x29x16
Packaging dimensions (LxWxH)	mm	95x55x34
Packaging weight	Kg	0,05
Fit temperature	°C	-10 ÷ +55
Compliant to		EN 55083-2, EN 60065

Technical data refer to a temperature of 25 °C

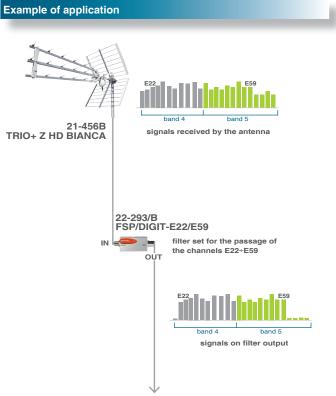

to the multiband amplifier UHF input



